





Ettes Power is the leading manufacturer and supplier for diesel & gas generators from 20kW upto 4500kW. We use world top engines (Cummins, MAN, CAT-MWM, CNPC 190 Series and Low speed 300 Series etc.) to ASSEMBLE into complete-generator-set and CHP units. Ettes gensets enjoy hot markets in more than 70 countries all over the world including Latin America, Africa, Middle East, Europe and Asia markets.

190 Series gas engines are developed by cooperation with AVL from Germany and Austria. The engine assembling plant is affiliated to CNPC (China National Petroleum & Oil Corporation), those engines work extensively in 90% of China oil fields and coal mines, and enjoy hot markets in global.

## Benefits of ETTES-CNPC 190 Series gas engines & Genset

- ◆ The engine performance is "Leading China" and "First class Global"
- ◆ Long history: produced by engines plant under control by CNPC (China National Petroleum & Oil Corporation), it is the first and the largest engine manufacture in China since 1953.
- ◆ Proven Technology: widely used in 90% of China Oil & Gas Fields, Coalmines, Vessels and other areas under severe working conditions.
- Fuel flexibility: designed for operation on a wide range of methane based gases including natural gas, biogas, oilfield gas, coal mine methane and shale gas and other special gas.
- ◆ Designed for intensive use (continuous duty)
- ◆ Capable of working with variable loads.
- ◆ Advanced technology of close-loop control, lean-burn and Mixing before turbo.
- ◆ Adopting highly intelligent gas control system of Woodward EGS or Motortech, the air fuel ratio can be automatically adjusted as per fluctuation of gas components.
- ◆ Adopting intelligent & digital ignition system from Motortech or Altronic.
- ◆ Adopting super-turbocharged technology from ABB.
- Heat Recovery system to realize CHP, Cogeneration and Distribution Energy.
- ◆ Integrated & modularized unit to facilitate easy transport and quick setup.
- Easy Maintenance in Low Cost.
- Ensured annually continuous working over 8000 hours.
- ♦ Longer life span of 15~20 years.








## Main Technical Data of Methane Gas Generator EJ-320NB Genset Model EJ-320NB Gas Gen-Set Rated Power (kW/kVa) 320/400 Manufacturer/Assembler **ETTES POWER** Gas Engine Manufacture **CNPC ENGINES ASSEMBLING PLANT** G8V190ZLD Gas Engine Model Engine Rated Power (kW/hp) 350/476 (1000RPM) Methane Base Gas: Natural Gas, Biogas, Oilfield Gas, Landfill Gas, Applicable Fuel Sewage Gas, Coalmine Bed Gas and Shale Gas etc. Water Cooled, Four Stroke, Spark Ignition, Turbocharger and Type after-cooled, Outer Mixing Standard: Open Cooling System by Heat Exchanger + Cooling Tower **Cooling Method** Optional: Closed Water Cooling by Fan Radiator 24VDC Electrical Starting Method Bore × Stroke (mm) 190×210 Displacement (L) 47.6 **Compression Ratio** 10:1 **Gas Engine** Average Speed of Piston (m/s) 7.17 8.Vee, 60° Angle Cylinder numbers and Type Governor/Actuator Woodward or Heinzmann or Motortech **Ignition System** Motortech or Altronic or Equivalent Rated Speed (r/min) 1000 (50Hz) / 1200(60Hz) Idle Speed (RPM) 700 **Direction of Rotation** Counter-clockwise Oil Consumption (g/kW.h) ≤0.8 Lube Oil Capacity (L) 180 Heat Consumption(kJ/kW.h) ≤9500 ≤550°C **Exhaust Gas Temperature** 10~20 (biogas) / 100~400 (natural gas) Intake Gas Pressure Required (kPa) Noise Level (Db) ≤110 (without silencer and soundproof container)

## **Alternator Brand** Siemens or Equivalent Alternator Model 1FC6 Series 50/60 Frequency (Hz) **SIEMENS** 400/230(50Hz), 480/270(60Hz) Rated Voltage (V) Other Special Voltages are available Power Factor (Cosφ) 8.0 **Alternator** Insulation Class IP23, Protection Class H Type Self-excited, Brushless **Excitation Method Voltage Regulation AVR** Standard Control System: advanced SIVAC control panel by Siemens Technology, adopting control module of ComAp Intellilite Series, with functions including manual keys, alarms, protections, auto start and shut down, showing running parameters in LCD Display. **Control System** Engine SCADA System, Communications protocol RS485 **Options:** Auto parallel synchronization control panel, Remote control system etc. Net Weight (KG) 10700 **Size and Weight** Dimension (L×W×H, mm) 4566×2040×2200 (based on open cooling system) Main Electronic Performance Data Voltage Frequency Stabilized Instantaneous Instantaneous Recovery Stabilized Regulation **Recovery Time** Fluctuation Fluctuation regulation regulation Regulation Time ≤ 0.5% ≤ ±2% ≤ ±5% ≤ 0.5% ≤ ±10% <5s ≤ 0.5% **1**s

<sup>★</sup>Above values are provided for information purpose only and are non-binding. The data given in official offer is decisive.

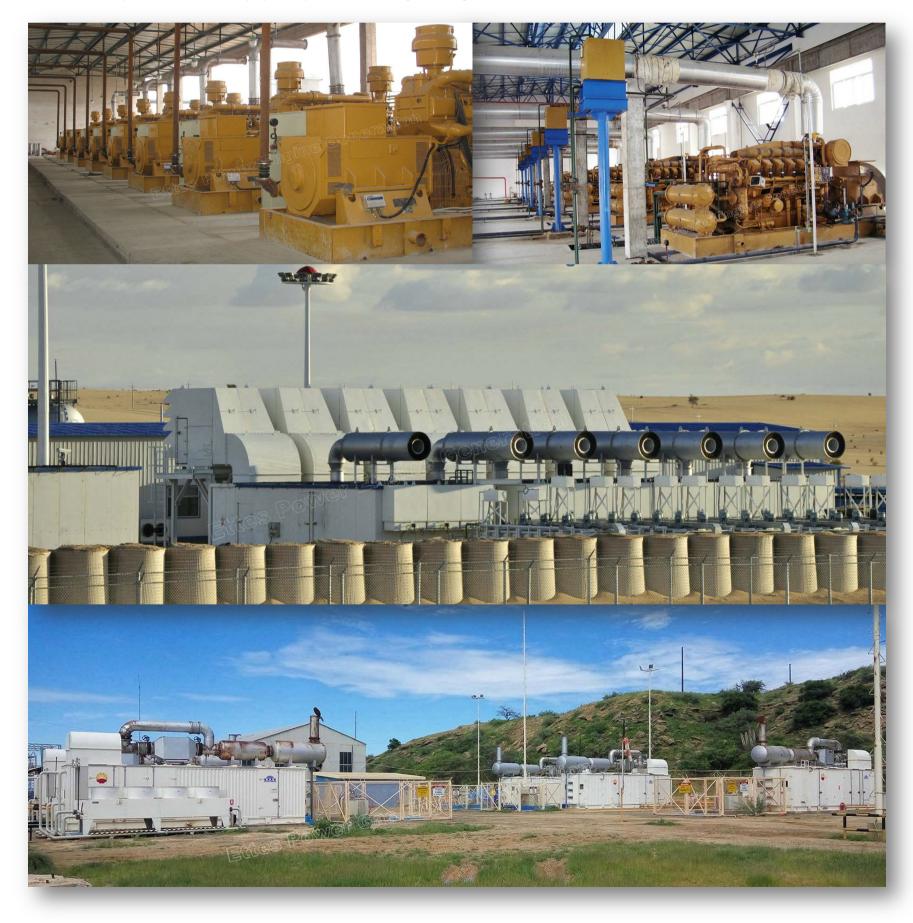

Website: www.ettespower.com Tel:+86-2223796980 Fax: +86-2223796811 Email: info@ettespower.com Docs Version March 2016