



Ettes Power Gas Generating Set can be powered by world famous gas engines of Cummins, Perkins, Man, MWM-Deutz, JDEC 190 and CSR 240/280 series, coupled with Stamford, Leroy Somer or Siemens alternators, power ranging from 20kva upto 4000kva. The applicable fuel can be natural gas, biogas, marsh gas and shales gas etc. By assimilating gas engine concerning technologies of Mixer, Ignitions System, Governor System from WOODWARD, MOTORTECH, HEINZMANN, ALTRONIC, IMPCO, STITT, our gas generator set can work at reliable performance, easy for maintenance, much longer life-span and very economic in price based on wonderful quality. Furthermore, special requirements for CHP System (combined heat and power), ATS, Soundproof Canopy, Parallel & Synchronization Control panel can be satisfied. Ettes Power natural gas generator set enjoy hot ready markets in domestic markets and overseas markets including South Africa, South America, Europe, Middle East and Southeast Asia countries etc.

### Main Tech Data of PERKINS Methane Gas Generator Set EP- 1250NB

<b>Gas Gen Set</b>	Genset Model	EP-1250NB					
	Rated Power (kw/kva)	1000/1250					
	Continuous Power (24 hours working per day)	1000 kW					
	Manufacturer	ETTES POWER					
 <b>Gas Engine</b> 	Gas Engine Manufacture	PERKINS Engines Co Ltd (UK)					
	Gas Engine Model	4016-61TRS2					
	Gross Engine Power (kW/hp)	1042/1397					
	Electrical Efficiency	<b>38.6%</b>					
	Cycle	Four Stroke,					
	Cylinder numbers and Type	16. in Vee					
	Induction System	Turbocharged and air-to-water Charge cooled					
	Combustion System	Spark Ignited					
	Governing	PANDAROS Digital Gas Governor(adjustable to standard of ISO8528-5 class G2)					
	Engine Knocking Control	Digital Detector for Engine Detonation, One Detector for Each Cylinder					
	Air-Fuel Ratio	Ultra-Lean Burn 1.7					
	Starting Method	24VDC Electrical					
	Cooling System	Water Cooled by Heat Exchanger or Radiator (optional)					
	Borex Stock (mm)	160x190					
	Displacement (L)	61.12					
	Compression Ratio	12:1					
	Direction of Rotation	Anti-clockwise viewed on flywheel					
	Total Lubricant Capacity (L)	286					
	Total Coolant Capacity (L)	95					
	Fuel	Natural Gas, Biogas, Coal Gas, Landfill gas and other Methane based gases					
	Fuel Consumption (kJ/kW)	2.5					
	Exhaust Gas Temperature (°C)	468					
Intake Gas Pressure Required (kPa)	TBA						
Rotation Speed (r/min)	1500 (50HZ)						
Oil Consumption (g/kw.h)	≤0.2						
Emission NOX (mg/N m3)	≤500						
Emission CO (mg/N m3)	≤500						
Overhaul Time (hours)	Around 60000						
 <b>Alternator</b>	Alternator Brand	Siemens, Leroy Somer or Equal					
	Alternator Model	LSA Series or 1FC Series					
	Frequency (HZ)	50					
	Rated Voltage (V)	400/230 (other Voltages is available)					
	Power Factor (Cosφ)	0.8					
	Excitation Method	Self-excited, Brushless					
	Voltage Regulation	AVR					
<b>Size and Weight</b>	Net Weight (KG)	10200					
	Dimension (LxWxH, mm)	4641*1836*2148*					
Main Electronic Performance Data							
Voltage				Frequency			
Stabilized Regulation	Instantaneous regulation	Recovery Time	Fluctuation	Stabilized Regulation	Instantaneous regulation	Recovery Time	Fluctuation
±2.5%	0.05	2s	0.5%	0-5% adjustable	±10%	<7s	0.5%

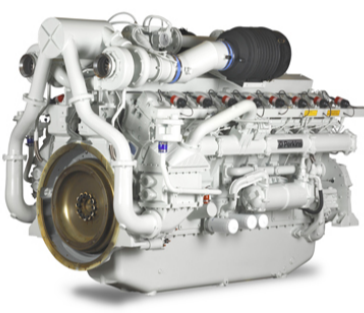